

AXIAL FANS





BSM - BST

AC INDUSTRIAL AXIAL FANS

Directly coupled motor. (single phase–three phase) 6 blades with concave blade system. Suitable for mounting on wall and window.

Technical Drawings

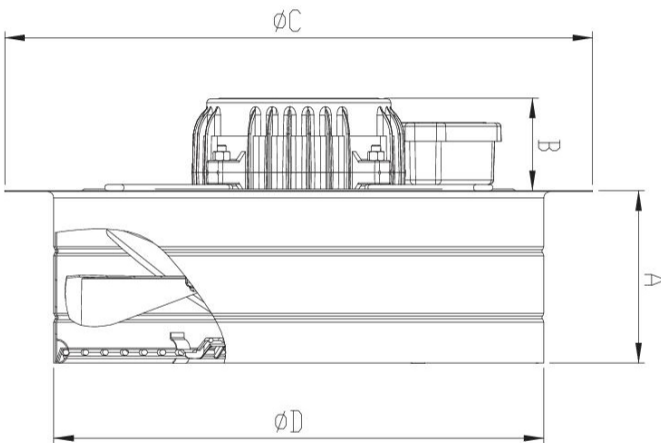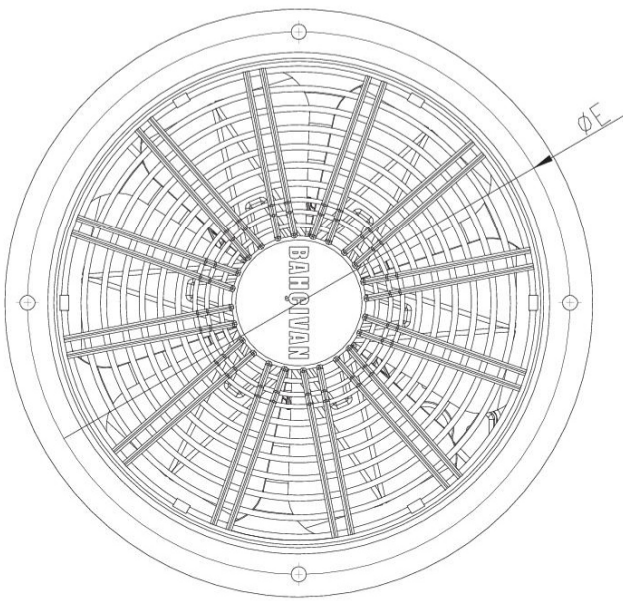

MATERIAL

: Housing is made of electrostatic powder coated sheet metal, impeller is made of sheet metal with concave blade system

INSULATION CLASS

: Class B

DIRECTIVE

: EN 60335-1, EN 60335-2-80

SPEED CONTROL

: Speed can be adjusted using an optional controller.

APPLICATION AREAS







: Factories, depots, dyehouses, shopping centers, workshops(plants) etc.




TYPE	VOLTAGE	FREQUENCY	POWER	CURRENT	CAPACITOR	SPEED	AIR FLOW	SOUND PRESSURE LEVEL	WEIGHT
	V	Hz	W	(A)	(μ F)	d/d	m ³ /h	dB(A)	kg
BSM 250-2K/BST 250-2K	230/380	50	1985	0,87	8/-	2900	2200	70	7.4
BSM 250 / BST 250	230/380	50	170	1,08	8/-	1465	1200	52	7.4
BSM 300 / BST 300	230/380	50	210	1,2	8/-	1400	2000	60	8
BSM 350 / BST 350	230/380	50	200	1,1	8/-	1400	3250	58	8.2
BSM 400 / BST 400	230/380	50	230	1,2	8/-	1420	4500	65	8.8
BSM 450 / BST 450	230/380	50	240	1,2	8/-	1385	5000	65	10
BSM 500 / BST 500	230/380	50	245	1,2	8/-	1335	5500	70	11
BSM 550 / BST 550	230/380	50	240	1	10/-	1350	6000	60	14.6
BSM 600 / BST 600	230/380	50	235	1	10/-	1370	8000	65	15.6

TYPE	A	B	C	D	E
BSM 250-2K / BST 250-2K	114	61	304	251	277
BSM 250 / BST 250	114	61	304	251	277
BSM 300 / BST 300	114	61	390	325	360
BSM 350 / BST 350	114	61	435	374	405
BSM 400 / BST 400	114	61	485	427	455
BSM 450 / BST 450	114	61	546	470	516
BSM 500 / BST 500	125	61	590	518	560
BSM 550 / BST 550	130	160	624	560	595
BSM 600 / BST 600	130	160	674	610	645

Dimensions are in (mm)

AXIAL FANS

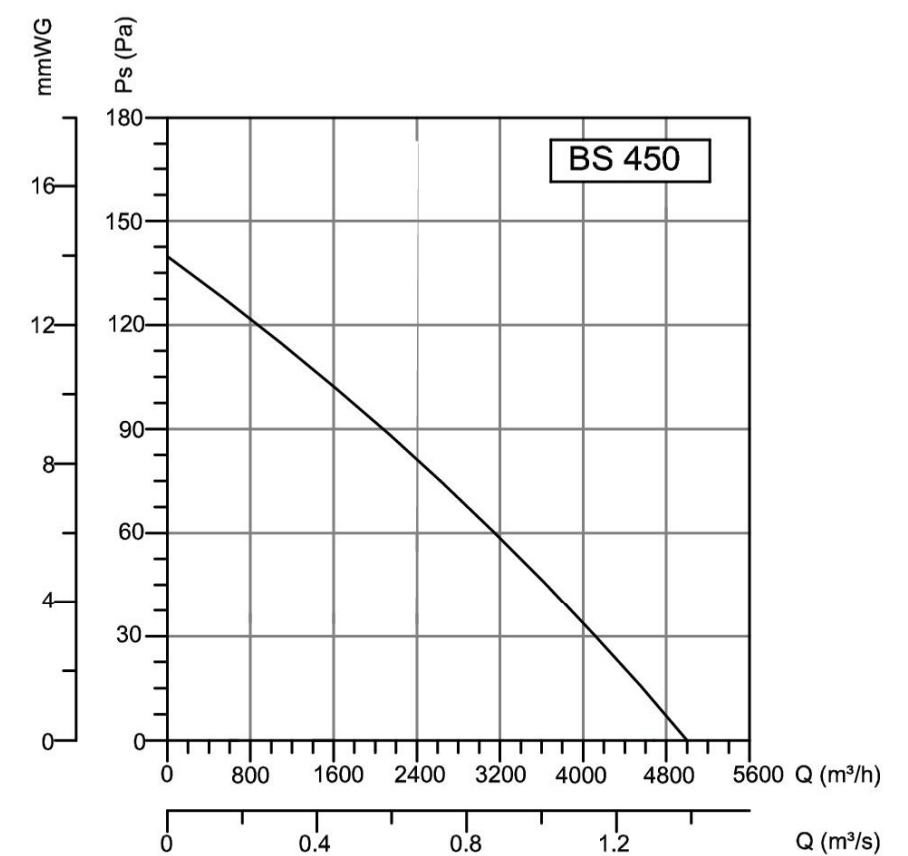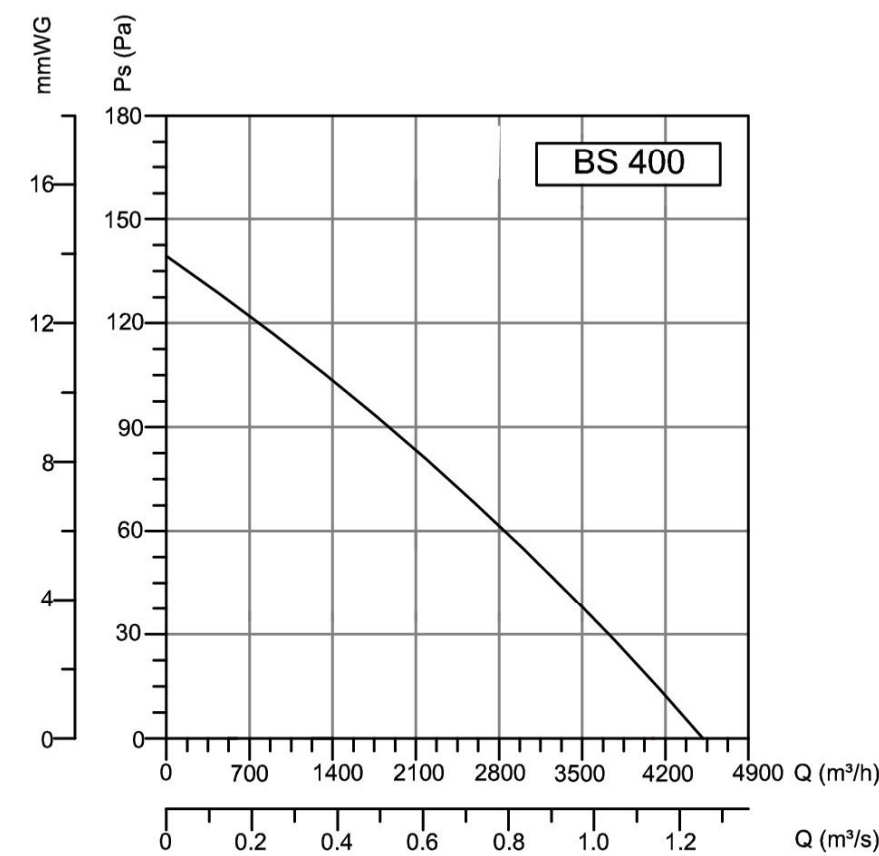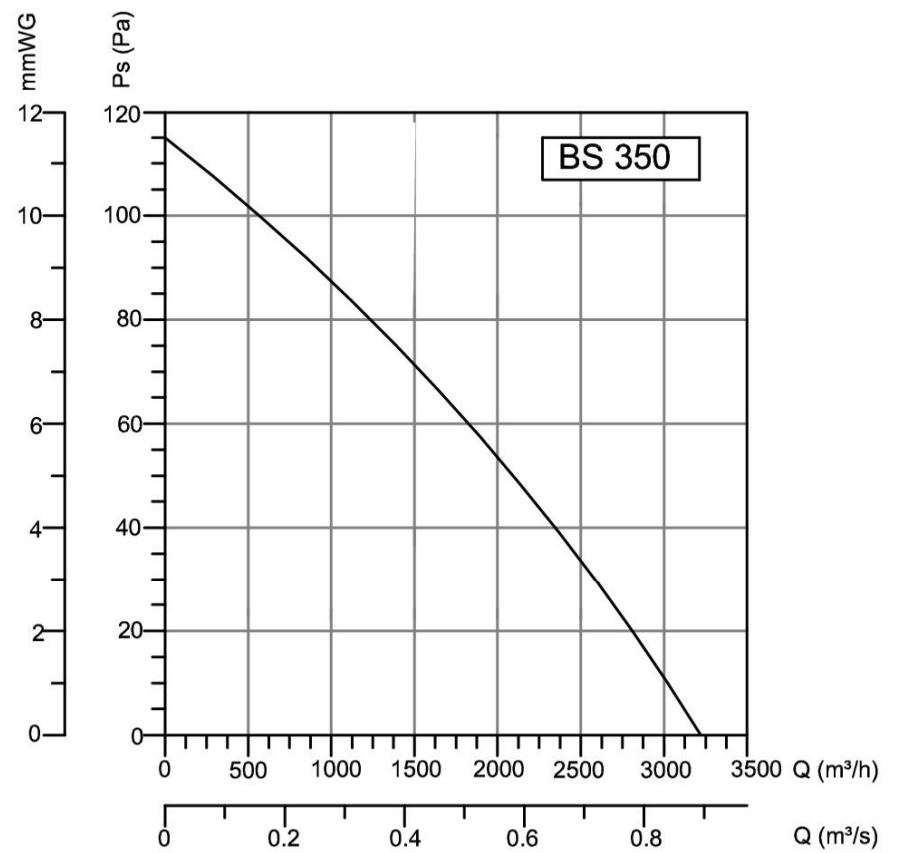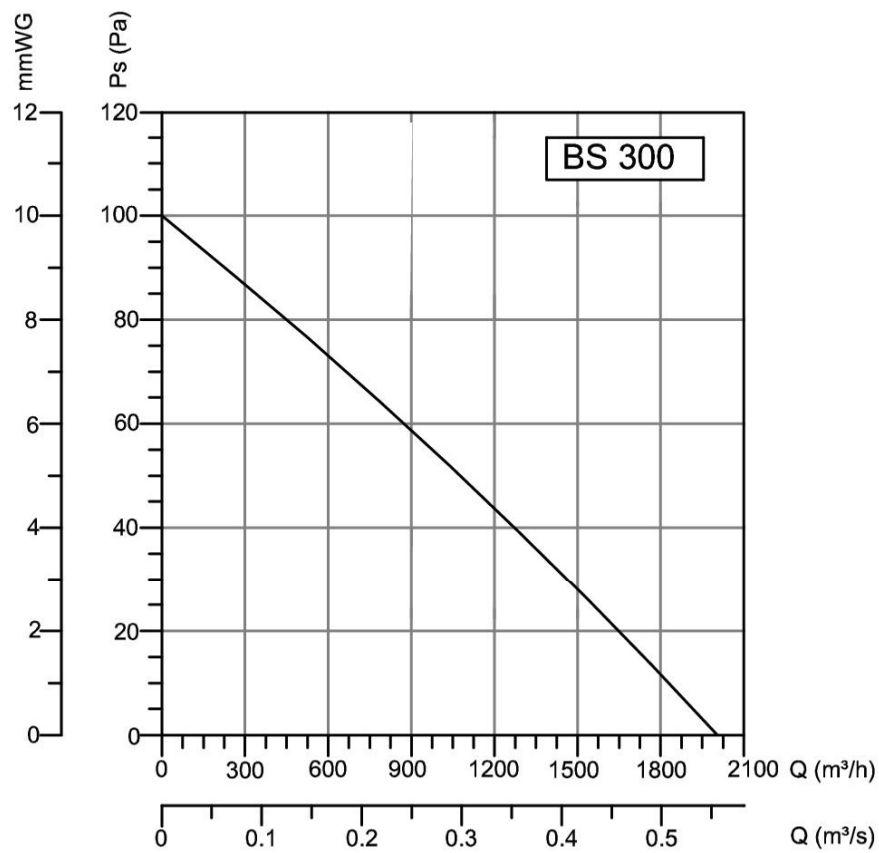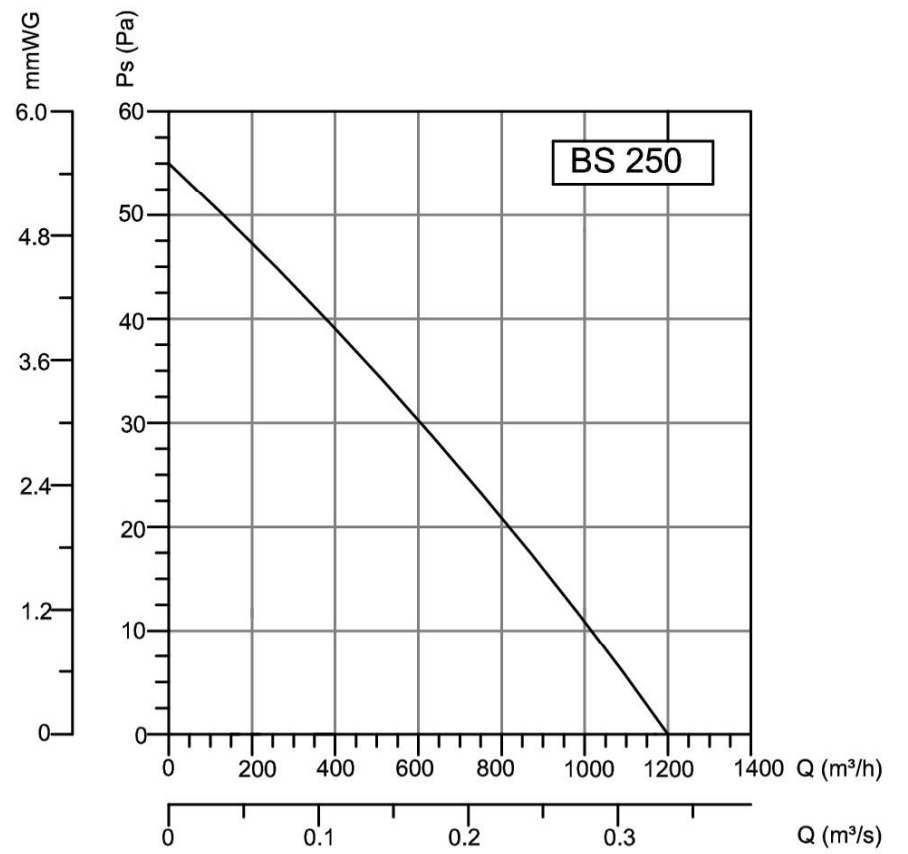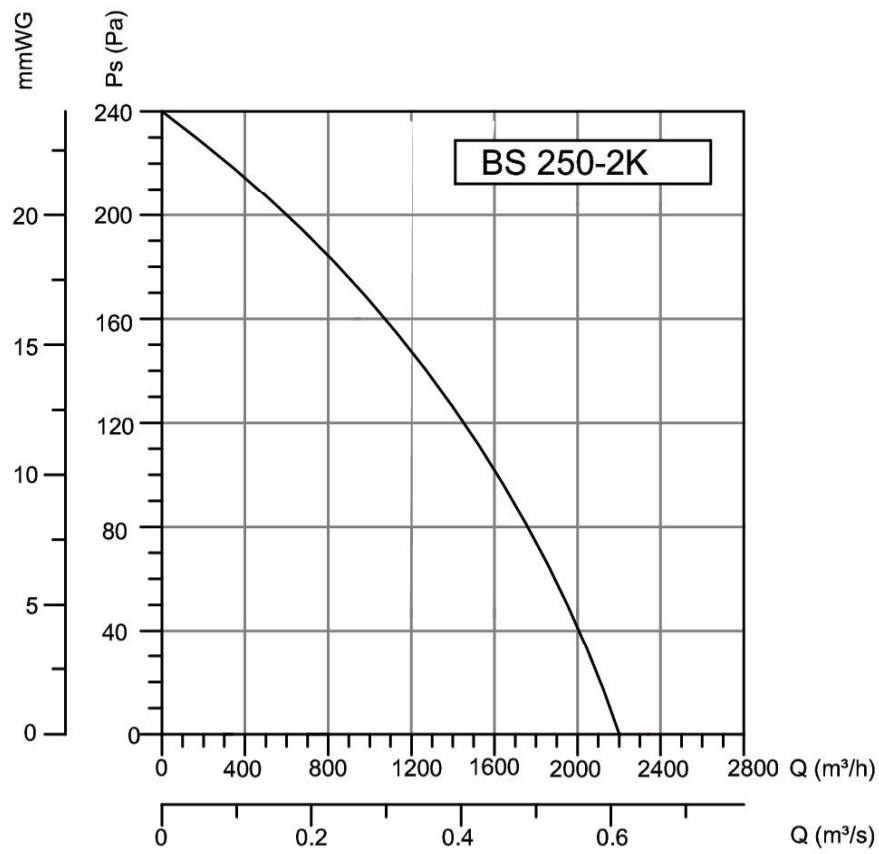

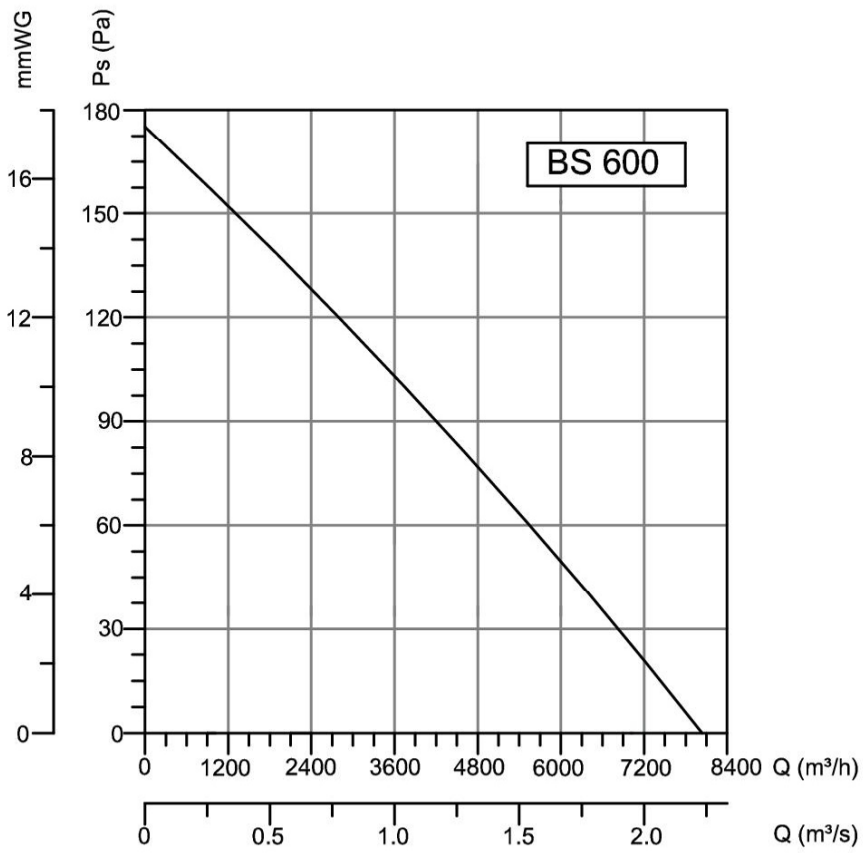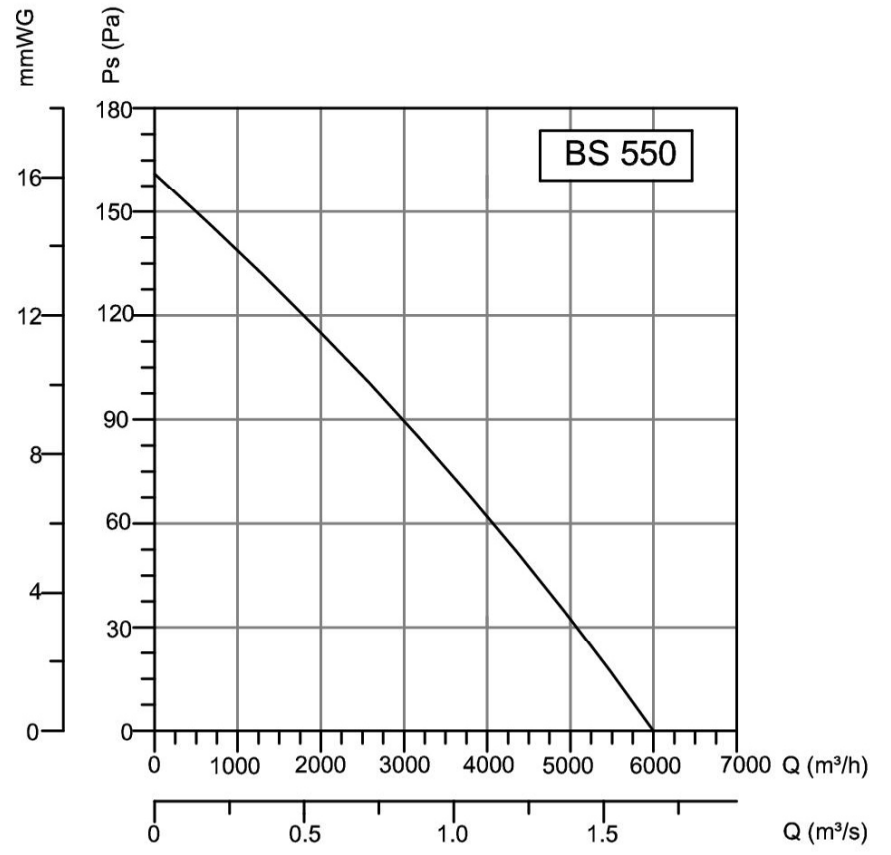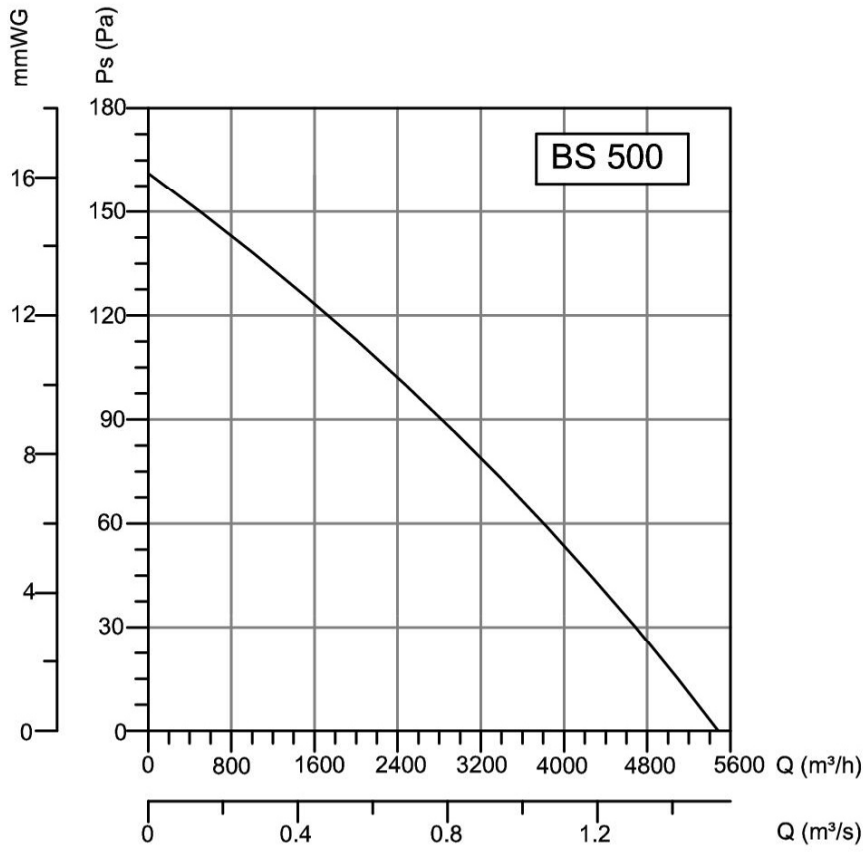

DUCT FANS

ROOF FANS

AXIAL FANS

RADIAL FANS

PLASTIC FANS

VENTILATORS

SMOKE EXHAUST SYSTEMS

ACCESSORIES